
AVION WATER CO, INC.

GENERAL TRENCH DETAIL

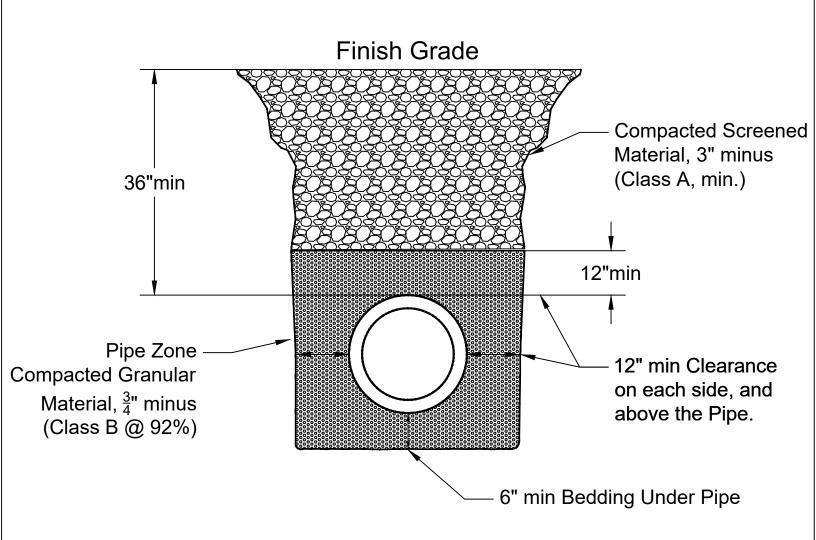

NOTES:

- MUST ADHERE TO CITY AND COUNTY ROW SPECIFICATIONS, when applicable.
 Pipe bedded in compact granular material to the centerline of the pipe, 6" minimum under the pipe.
 Compacted granular material, 12" above top of pipe.
 Compaction testing shall be performed at the top of pipe zone, 12" min above waterline. Compaction testing shall meet 92% and tested every 100ft.

DWN BY: <i>TEL</i>	Avion design specifications do not relieve the developer,	AVION WATER CO	NOT TO SCALE
DATE: April 2022	engineer, or contractor from responsibility to design and	60813 PARRELL RD BEND, OR 97702	REV/DATE
	construct the water system in	,	REV/DATE
Avion Water	accordance with good		REV/DATE
	engineering and construction practices. Must adhere to OAR	GENERAL TRENCH DETAIL	
BEND, OREGON	333-061-0050 Construction	OLIVE TIXEITOTI DETAIL	
	Standards.		